



Model ACen 44


Ideal for industrial and commercial sites, public parking lots

Features

- ACen 44: maximum 44kW
- 3-phase connection (3P + N)
- 2x socket (Type 2)
- Internal loadbalancing

Why a CenEnergy charging station?

- Start / stop with RFID
- Online management
- Helpdesk 24/7
- Invoicing and split billing
- Powder coated aluminium casing
- Corrosion- and scratchresistant

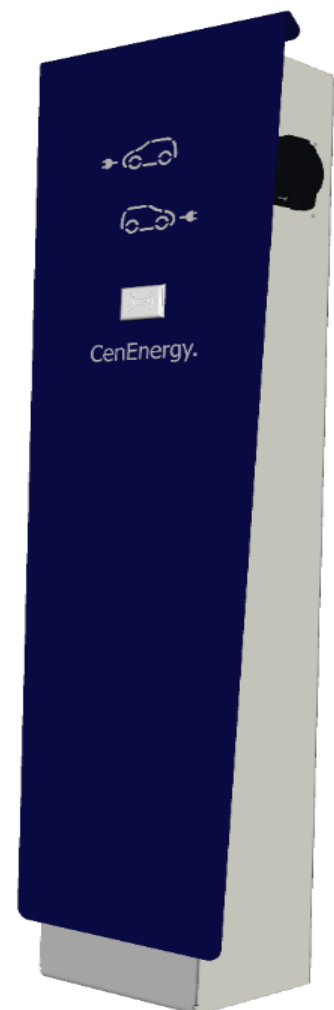



Model ACen 44 – technical information

Charging

- Vehicle interface: 2x Type 2 socket
- Power rating: 3P + N (3x 230V AC @ max 63A // Max 44kW total // Max 22kW per channel (loadbalancing))

Operating conditions

- IP54: indoor/outdoor
- Operating temperature: -25°C tot 55°C
- Standby Power: 1.2W

Mechanicals

- 3mm aluminium casing
- Powder coating
- 1250 mm x 350 mm x 175 mm

Technical drawing

